


# Photopolymer Plate Processing Equipment

3ES-PROIV-ETLC HD

*Top lift Exposure*



3ES-PROIV-ETLC HD

Plate making equipment for photopolymer plates up to a maximum size of 1320 x 2032 mm.

- Capable of exposing and finishing&post-exposing\* all high quality photopolymer plates at high dot resolution, excellent line definition, deep reverses repeatable results for both back and main exposures to meet the highest HD Flexo standard
- High power UV-A lamps for high quality at high speed
- Easy to operate, install and maintain
- User-friendly 7" touch screen operation panel displays all necessary times and settings
- 20 programmable channels for different plates process conditions
- Anodized aluminum cool bed with accurate temperature cooling unit
- The top lid opens/closes smoothly and completely, it makes easier to reach all four sides of the plate.
- Powerful and fast vacuum system and vacuum indicator on control panel
- Suitable for all digital and analogue plates
- Lamp life calculator
- Defective lamp indicator
- Lamp temperature control and regulation with cooling fan
- Yellow inspection lamp
- Electronic ballast
- End of job alert
- One drawer for stock/Light Finisher&Post Expose\*

\*Optional



**high** quality performance


**innovative** ideas solutions

**excellent** view productivity

# Photopolymer Plate Processing Equipment


3ES-PROIV-ETLC HD

Top Lift Exposure



## Technical Data

|                                   |  |
|-----------------------------------|--|
| <b>Product Name</b>               | 3ES-PROIV-ETLC HD                              |
| <b>Maximum Plate Size</b>         | 1320 x 2032 mm (52" x 80")                     |
| <b>Plate Type</b>                 | Analog & Digital Plates                        |
| <b>Exhaust (Light Finisher)</b>   | Ø100 mm  |
| <b>Compressed Air</b>             | 7 bar minimum                                  |
| <b>Environmental Requirements</b> | Temperature : 15°C to 30°C Humidity : 40% -60% |
| <b>Power</b>                      | 10 kW 16A 400 V AC (3 Ph/N/PE)50/60 Hz         |
| <b>Crate Dimension (approx.)</b>  | 2700*1960*1650 mm                              |
| <b>Weight</b>                     | 1300 kg net / 1700 kg gross                    |
| <b>Options &amp; Accessories</b>  | Finishing & Post-Exposure                      |

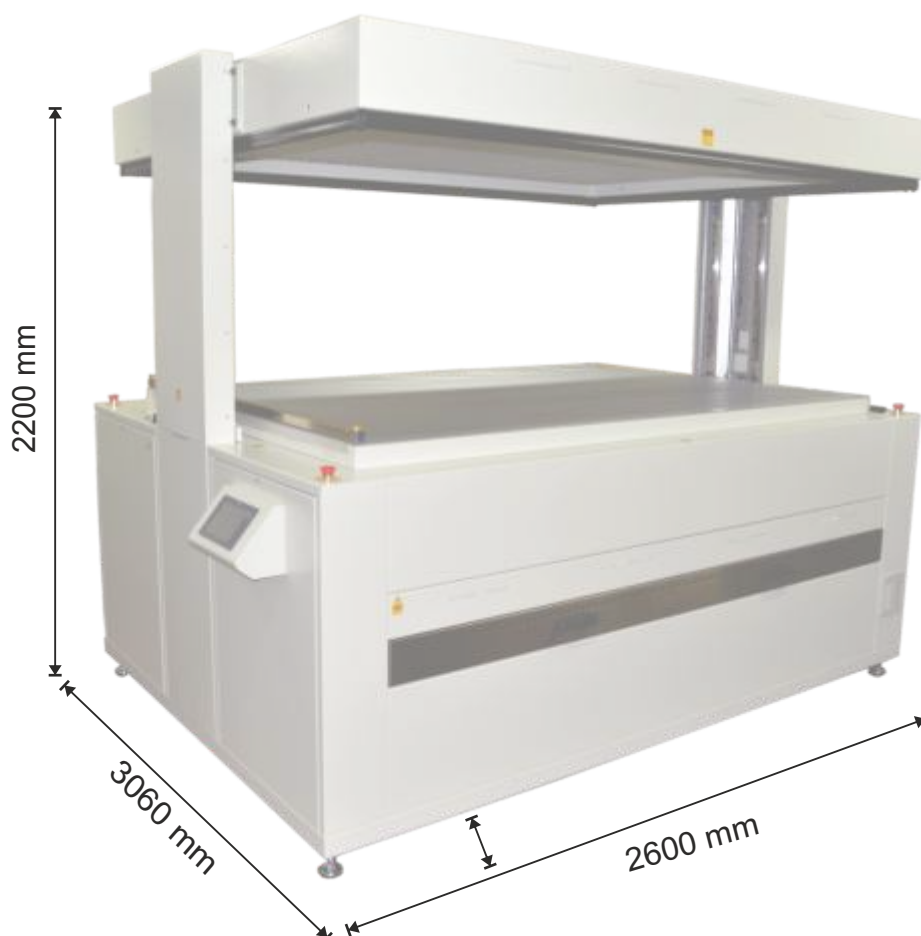

For all other information's or request please contact Mega.....

**Mega Elektromekanik Mak. Iml. Ith. Ihr. San. Tic. Ltd. Sti.**

Dudullu OSB DES-113 Sk. C-13 Blok N:58 34776 Umraniye Istanbul Turkey

T. +90 216 612 48 97 - 98 F. +90 216 612 15 72 info@3esmega.com

Mega Elektromekanik reserves the right to make changes in the product features without warning.

www.3esmega.com

